



Videojet 2300

≈

”A
,

л 462188-10
, AA, 2010 5

2010 5 ~ Videojet Technologies Л ^ ЛЮ Videojet~ Â Â

Videojet Technologies Л ~ Û Videojet Ѓ ж Â Y "I

Videojet "À Ñ Â Â CLARITY® ã CLARISOFT® Ѓ CLARINET®

Videojet Technologies

1500 Mittel Boulevard ' 1-800-843-3610

Wood Dale, IL ' 1-800-582-1343

60191-1073 USA ' 630-616-3629


www.videojet.com

¶ Y - ' e ~ ¶ Ъ

' ¶ ä ä ä ä ä

¶ ä ä


† Ñ



√ ЛЮЧ ∼ ^ FCC~ 15 † Â p
1) a ∼
2) √ ∼ a Â



|| Â y ∼
Â



ϵ 8 ∼ FCC 15 † A 8 Â
Â à П √ √ Ю √ A
П ∼ Â Ю Â √ √ Â

Pour la Clientèle du Canada

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

Cet équipement est certifié CSA.

CE  LUY

EU EMC 2004/108/EC

6  
 EN61000-6-2:2005 
 BS EN 55022:1998 +A1 2000  IT 
 +A2 2003  A  
 BS EN 55024:1998+A1 2001  IT  
 +A2 2003
 EN61000-3-2:2000  16A 
 EN61000-3-3:1995 +A1 2001  IT



Videojet Technologies 1-800-843-3610
Videojet Technologies

Videojet Technologies
1500 Mittel Boulevard
Wood Dale, IL 60191-1073 U.S.A.
1-800-843-3610
1-800-582-1343
630-616-3629
www.videojet.com


•

Total Source

Total Source® TOTAL SERVICE PLUS RELIABILITY
Videojet Technologies

Total Source

Videojet **Total Source®**
•
•
•
•
•
•
•
•
•
•



.....	i
.....	i
Pour la Clientèle du Canada	ii
.....	ii
.....	iii
.....	iii
.....	iv

1 —	
Videojet 2300	1-1
.....	1-1
.....	1-2

2 —	
.....	2-1
.....	2-2
.....	2-2
.....	2-2
.....	2-3
.....	2-4
.....	2-4
2300	2-6
.....	2-6
.....	2-7
.....	2-9
.....	2-10
.....	2-10

3 — CLARITY®	
.....	3-1
CLARITY®	3-2
.....	3-2
.....	3-2
.....	3-5

4	—		
		§	4-1
			4-4
		ü §	4-5
		§ LED ¶	4-6
		¶	4-6
			4-6
			4-7
			4-11
		√ §	4-13
		§	4-14
		'A'	4-15
		'B'	4-15

5	—		
		§	5-1
			5-1
		√	5-5
			5-5
		√	5-6
			5-9
		ü § ^ / ~	5-10
		§ Æ	5-11
			5-13
		~ ¶	5-14
		¶	5-18
			5-20

Videojet 2300

Videojet 2340 à 2350 et 2360 sont des imprimantes à jet d'encre à haute résolution, conçues pour répondre aux besoins les plus exigeants en matière de qualité d'impression. Elles offrent une gamme de formats allant de 17 à 70 cm de largeur, avec une résolution de 2000 x 2000 dpi. Les imprimantes sont équipées d'un système d'encres CLARiTY® à quatre couleurs (cyan, magenta, jaune et noir) qui permet d'obtenir des couleurs vives et précises. Elles sont également dotées d'un système de gestion des couleurs intégré, qui permet de garantir la cohérence des couleurs entre les différents supports d'impression. Les imprimantes sont conçues pour être utilisées dans des environnements industriels, où elles doivent résister à des conditions de travail difficiles. Elles sont également équipées d'un système de sécurité avancé, qui permet de protéger les données imprimées contre les accès non autorisés. Enfin, les imprimantes sont conçues pour être faciles à utiliser et à maintenir, ce qui les rend idéales pour les entreprises qui ont besoin d'une solution d'impression fiable et performante.

§

2300 est une imprimante à jet d'encre à haute résolution, conçue pour répondre aux besoins les plus exigeants en matière de qualité d'impression. Elle offre une gamme de formats allant de 17 à 70 cm de largeur, avec une résolution de 2000 x 2000 dpi.

§	1	§
Videojet 2340	17	X 2000
Videojet 2350	50	X 2000
Videojet 2360	70	X 2000

1-1' §


' Videojet 2300 § à l' § L:Â


ŷ

Ю

À



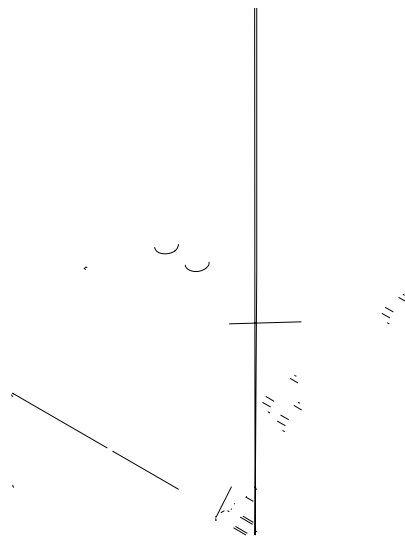

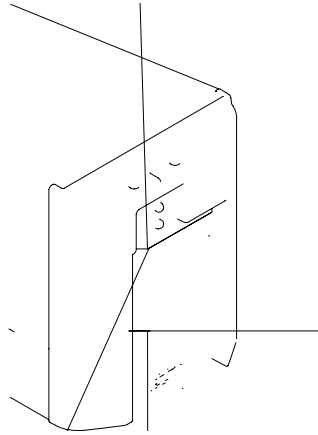

лю́ть

•

Л Ж А

А

Э Ф А Л а Л Л

У

У а й
У Л Л Ъ Л
Г Л
~



А

А Ю У Г Ж Л Э А
~ А

У

У а й
У Л Л Ъ Л
Г Л
~



↑

↓

AC

↑

OFF (O)



~

Â a
Â

ξ

~

Â ĩ

~

ϑ ~ ~ ð ~ ლ Â
ê _____ANSI/NFPA 70-1993 ĩ 500
Â
ლ ψ
Â

MSDSÂ Ɔ Â ~



~

Â ~ y ლიუ Â
Ɔ ~ ა Ɔ ~ y ლიუ Â
ი ~ ~ a æ -22℃ (-8ℱ) ა a æ
56℃ (133ℱ) Videojet Â



~

Â



I

⚠

3 Â Â Ю § ~ Ÿ

⚠

60947-3 Â IEC 60947-2 é Ÿ Â IEC
л у

⚠

Â § Ÿ р ѳ л Â ~ Ё Ѡ Ÿ

⚠

Â' _4ýðMPX



~

Â Videojet 2340 à 2350 0 2360

8

^ - a è é 0 /
 à ~ ì
 Â a 0 Â



~

Â 0 0 0 0 0 0 0
 ÿ 0 / 0 0 0 0 0 0

ε



ת

Y

ת

Â



~

ת

~

ת

Â

§

Y

~

ל

ת /
Â

MSDS

ת

Â

☺


ת

ת

- CLARITY[®] ý
-
-



CLARITY® ý

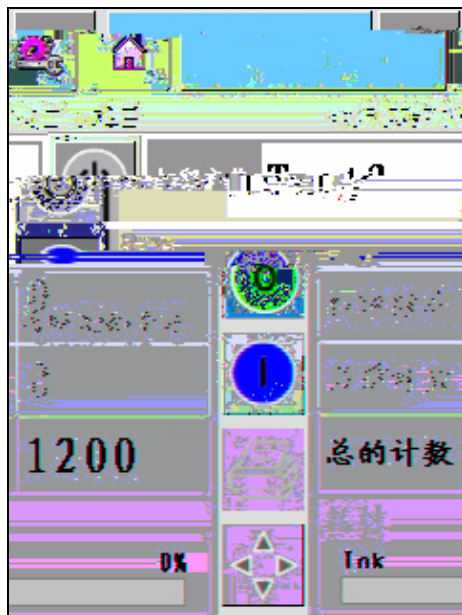CLARITY[®] *y* 3-1 Â

3-1' CLARITY® ý

Э

 $\vdash$ $\wedge$ $\hat{A}$


3-2 $\cap$ 3-3

e

—

3-1~ $\hat{A}$

Л ъ

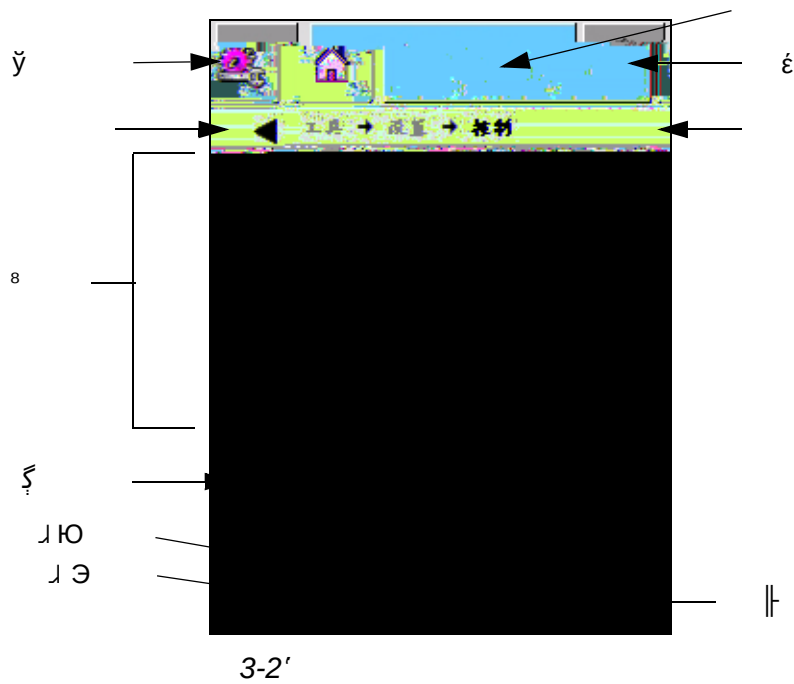

ŷ	ŷ
	П ~
ε	П ε
	ЭЮ y Â Videojet 2340/2350/2360 Â
8	3-4 П 8 L Â
	П ξ ЮУ ^ ~ П √
	Л Ю ' Æ Â Л
	• ЭУ
	• Э Â

3-1'

CLARITY®



3-5'

a 3-2

1	1...?/:!-&;+#()'"_@\$£€¥%<>¿¡§=α
2	ABC2abcÄÅÄÄÄÄ/ÆÇääääääåæçø
3def	DEF3defÊËËËËËèéêë€
4ghi	GHI4ghiîïîîî
-	JKL5jklË
6mno	MNO6mnoÖÖÖÖÖÖøÑöôôôøñ


3-2'

Ю ' ,


- §
-
- Û || §
- § LED ¶
- ¶
- √ §
- §

§

Ю N

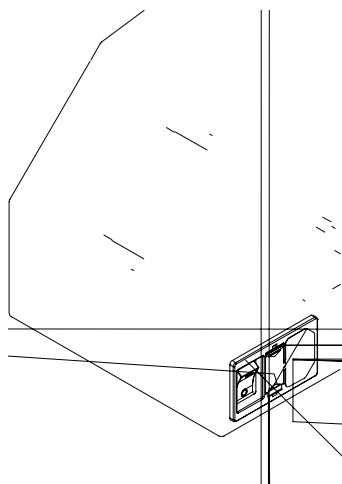

1. Adjust the nozzle to the correct position. The nozzle should be perpendicular to the surface being printed. The distance between the nozzle and the surface should be approximately 1/16 inch (1.6 mm). The nozzle should be adjusted so that it is perpendicular to the surface being printed. The distance between the nozzle and the surface should be approximately 1/16 inch (1.6 mm). The nozzle should be adjusted so that it is perpendicular to the surface being printed. The distance between the nozzle and the surface should be approximately 1/16 inch (1.6 mm).
2. Adjust the CLARITY® ink flow. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed.
3. Adjust the CLARITY® ink flow. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed.
4. Adjust the CLARITY® ink flow. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed. The ink flow should be adjusted so that the ink is applied evenly to the surface being printed.

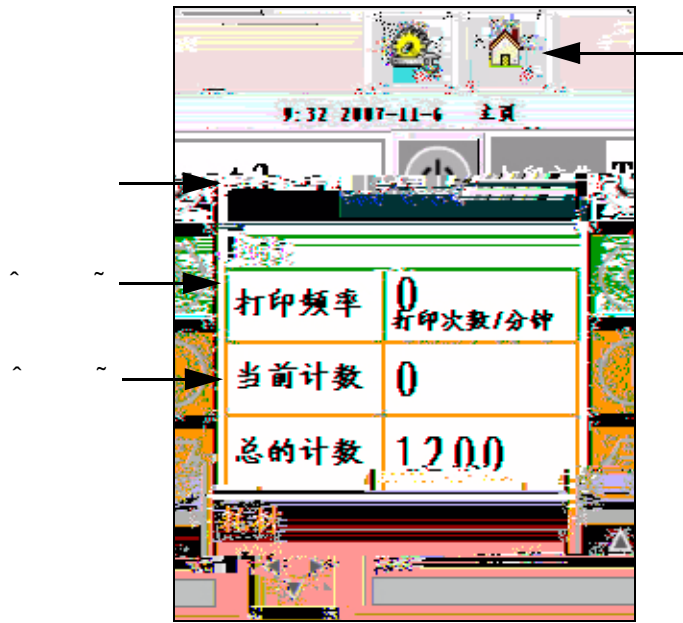

5

4-3~

$$\begin{array}{ccccccc} \zeta & & \chi & & \zeta & a & \eta \\ & \chi \cap & \chi & & \hat{A} & & \\ & & & & \cap \zeta & \cup // & \hat{A} \end{array}$$

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.



1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.

2300 4-1

| Model | Pressure (MPa) |
|---------------|----------------|
| Videojet 2340 | 2.5 |
| Videojet 2350 | 3.5 |
| Videojet 2360 | 4.5 |

4-1'



4-4' Videojet 2340 ã 2350 2360

Ů ‖ Ź

Ů ‖ /

Ů ‖ Ź Â

Ů ‖ /

Ź ‹ ‹ Ÿ

- CLARITY® Ÿ ^ 4-5~ Â
- Ź ‹ ‹ è Ź Â
- Ÿ ‹ ‹ ^ 4-5~ Â

- U êC±Rü % C ŵY` yxE ñ €.f}P 1× ÍĐ

§

LED

CLARITY® Ю У Ъ LED §
4-6~ Â


LED è 4-2 Â

¶

лю ъ

-
-
- §

ѣ

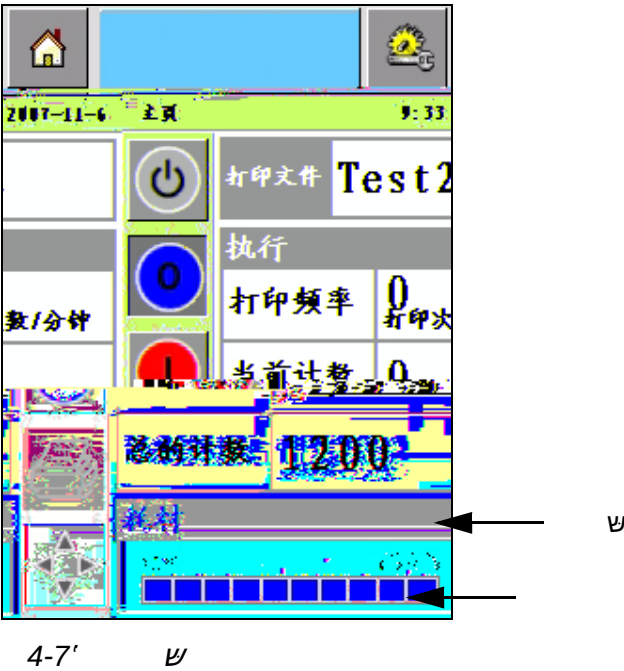

Ю'

| | ˘ a Â |
|--|---------------------|
| | л ξ ˘ л ы y Â a ы æ |
| | ˘ ξ Â ы 3 Â |

4-3' ψ

æ ˘ CLARITY® Э ˘ ы Â
5%˘ 4-7˘ Â Э
й л Â
□ Â й ˘ ξ ˘ ξ y


$$\begin{array}{ccccccc} \xi & & \wedge & & 4-4 & & \hat{A} \\ \vdots & & & & & & \end{array}$$

| Σ | 175 | 365 |
|---------------|--------|--------|
| Videojet 2340 | M512-4 | a |
| Videojet 2350 | M512-4 | M512-K |
| Videojet 2360 | M512-4 | M512-K |

4-4'

Ю

1 ѳ Э ѱ ^ 4-7 4-7~ Â
^ 4-8~ Â



7

4-8'

$$2 \quad \begin{array}{c} \nearrow \\ 4-9 \sim \hat{A} \end{array} \quad \wedge \quad 4-8 \sim \hat{A} \quad \begin{array}{c} \nwarrow \\ \nearrow \end{array} \quad \wedge \quad 4-9$$

3 Ю Ю Â



4-9' 77

$\frac{4}{\Gamma} \leq \hat{\Delta} \leq \frac{9}{\Gamma}$



4-10' ?

$$\begin{matrix} & \{ & \sim \\ \{ & \hat{A} & \end{matrix}$$
$$\hat{4-10} \quad 4-11 \sim \hat{A}$$

4-11~ $\hat{A}$



4-11'

3



$\hat{a}$ a $\hat{a}$ ξ η ν z
 a $\hat{a}$

5 CLARITY® η ν η $\hat{a}$ ν
 Ю



a. ÿ

Ю

Â

b.

Æ

Ј

ˆ

4-13~ Â

c.

Â

Â

,

˘

А

?

Â

Ю

,

1

˘

Ÿ

Э

2300 4-5

| Grade Level | Percentage |
|-------------|------------|
| 5th | 10% |
| 6th | 10% |
| 7th | 10% |
| 8th | 10% |
| 9th | 10% |
| 10th | 10% |
| 11th | 10% |
| 12th | 10% |

• p ž || a ^ ~ à ~
 • ž ž ž ž
 • Э p
 • ž n ž а у Â люЮ
 ,
 - p ^ p ~ у Â
 - p √ ^ ~
 ' ž ~ ž n p а 2
 ^ 4-17~ Â Э 8 Â
 ' ž
 ž ж б p Â // ž √

5

5

Ю

~

5

Э

A ∩ B

П

П

У

'A'



ط

ط

^

Ю

١

٢

Ю

٢

Ю

~

AA

٢

Ю

ч

٢

у

~

л

~

||

٢

□

^

□ A

A

~


л

- ξ_{τ}
- $\downarrow$
-
- $\mathbb{U}$ ξ_{τ} $\wedge$ $/$ $\sim$
- ξ_{τ} $\mathbb{A}$
-
- $\succ$ $\cap$
-
- $\cap$
-


٥٠

5-6~
 5-5

1

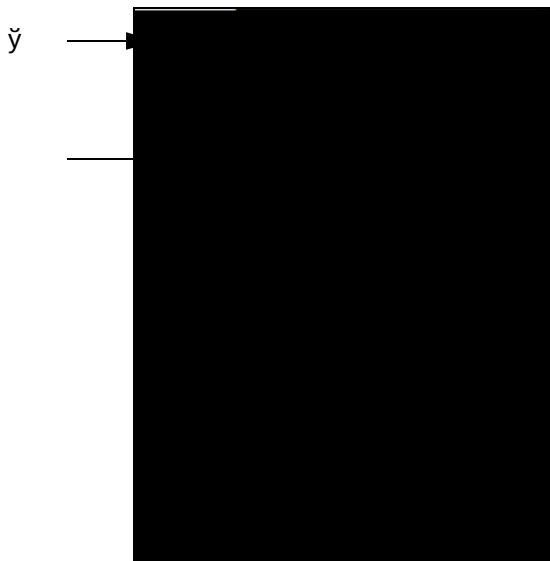


5-1'

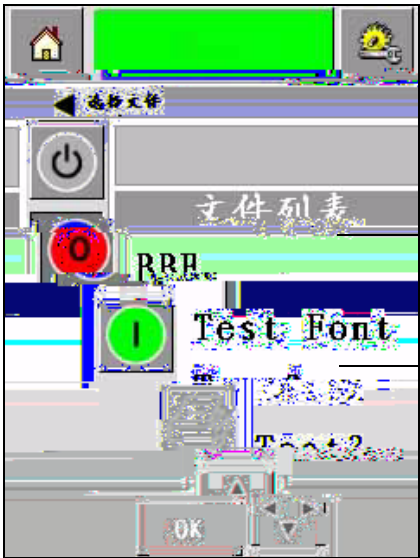


5-2'

2 5-3~ Â




5-3'

3 a 5-4 5-4~ Â 5-4~ Â 5-4~ Â 5-3~ Â

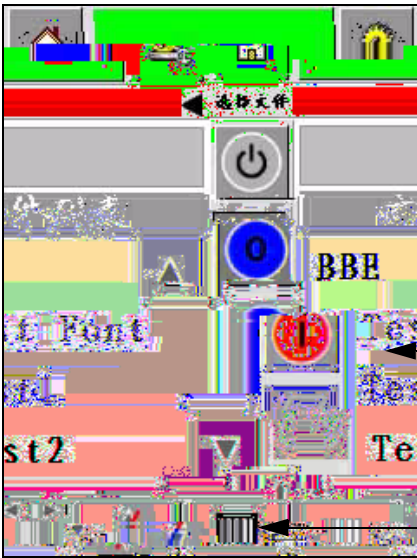

5-4' //

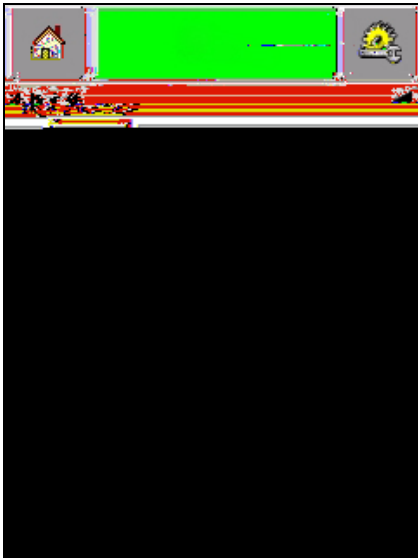

5-5'

ۛ



ۛ

•

A

2 5-8 Å

• 0 0 0 Å
 • y 0 Å
 ' 5-8 Å a Å
 3 0 0 Å
 4 CLARITY® 0 0 0



5-9'

5

Â

5-10~ Â



5-10'

6

Â

ξ

ξ

p Â

л
Â

л

✓

Ÿ

1 2

 $\hat{A}$ 

Ÿ Â


Ů

Ź ^ / ~
 Ů Ź ~ Ź √ ÿ
 ^ 5-13~ Â
 ~ ^ ~ ^ 5-13~ Ź
 Â

' Ź Ź Ÿ ~ Ź a Â
 ' Ź Ź Ÿ Ÿ ~ Ź Ź
 // Â
 Ź ~ л ю ||'
 •
 •

§ Æ

1 ↑ Ÿ é > > § Â § ^ 5-14~ Â

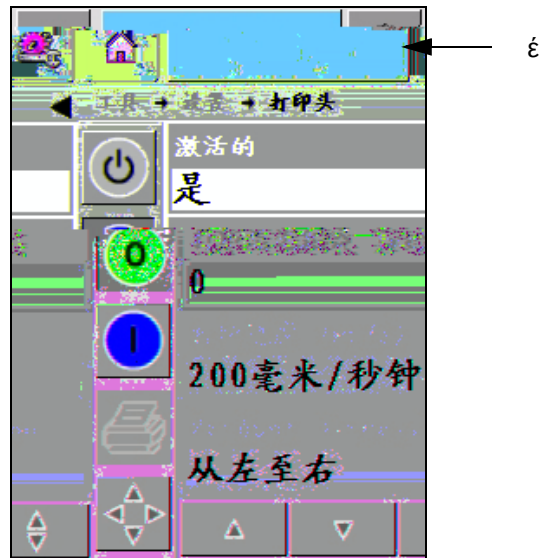

5-14' §

2 ^ 5-12 Â 5-15~ Â § Æ ^ Æ ~
Ю у '

-  Æ Â
- ^ 5-12 5-16~ Â
- à ^ 5-13 5-17~ Â



5-15'



5-16'

-


3 æ â
' ð á ð
â
ÿ 2340/2350/2360 ÿ ÿ
ÿ â ÿ ÿ ÿ ÿ ÿ ÿ
ÿ ÿ ÿ ÿ ÿ ÿ ÿ ÿ



5-18' □ ↵

↵

5-14 CLARITY® 5-19~ Å

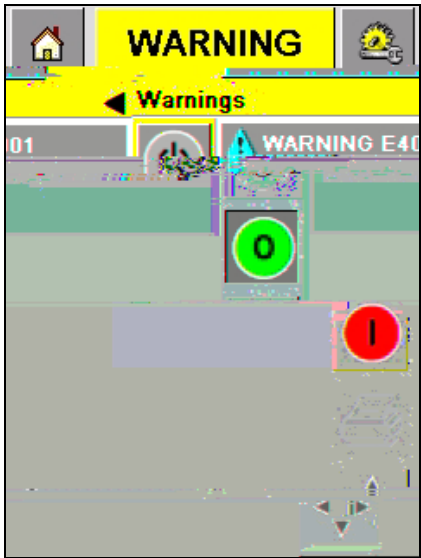

5-19' ↵

CLARITY® Л и ^ 5-21~ Â ~
 § a ~ Â 5-21 Л Â



5-21'

§ ~ § Â Л Э || П р
 § Â

3 § ' CLARITY® ~ Ю LED ^ ~
 § Â

~ CLARITY® у е Â
 5-17 5-22 § Â Э ~
 5-22~ Â CLARITY® Э ^ 5-17




5-22'


I L ~ §
A § A

Â J ~

1. 按 **CLARiTY®** 按钮，然后按 **5-23** 按钮。

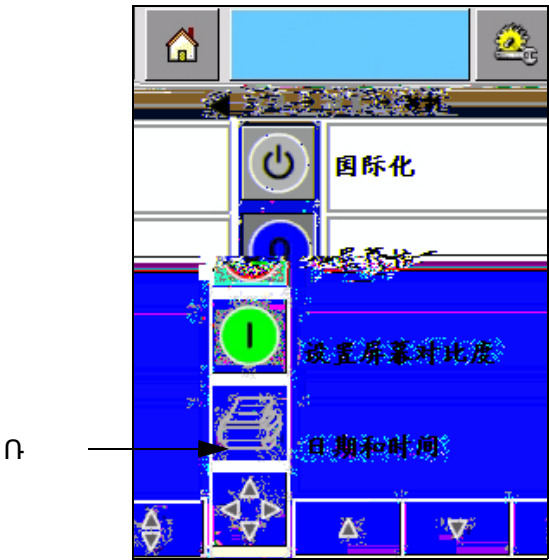

2. 按 **5-23** 按钮。
3. 按 **5-19** 按钮。
4. 按 **5-24** 按钮。
5. 按 **5-24** 按钮。
6. 按 **5-24** 按钮。



5-24'

7 5-25~ 5-25'



5-25'

8 5-26~ 5-26'

9 5-27~ 5-27'

10 5-28~ 5-28'

CLARiTY®

ル a ヲ

㏊

㏊ Å

ˆ Month Day Year~

ˆ Day Month Year~

Å

ルЮ

1 ↑

ε >

>

8 >


ヅ

ヅ

ˆ

5-26~ Å

Å

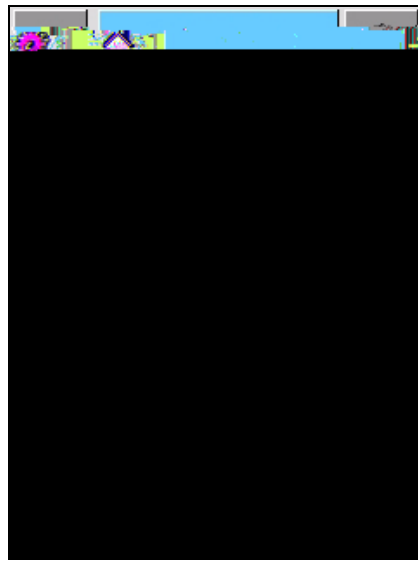

5-26'

ヅ

2

ˆ

5-21

ÿ

5-27~ Å

Å



5-27'

- 3 ^
- 4 / 几 ^ 5-20 5-26~ ^
- 5 ^ 5-28~ ^



5-28' /

- 6 ^
- 7 Ÿ Ÿ ^